Avery Dennison[®] TrafficJet™ Perform Little or Initial Charge


Instructional Bulletin : # 9.06
Revision : # 02
Last Updated : June 2018

Requirements

Make sure there is sufficient ink in the 440ml cartridges or 950ml bags to perform these actions and make sure the Cappings and Wiper are clean.

Perform Little Charge


- 1. Set Head Height to Low (Orange Lever)
- 2. Press the Menu
- 3. Click the Down Arrow button until you see Menu3: Cleaning>
- 4. Click the Right Arrow button
- 5. Click the Down Arrow button until you see Time: LittleCharge
- 6. Click Enter
- 7. Once the Little Charge is finished, set Head Height back to Mid (Orange Lever)

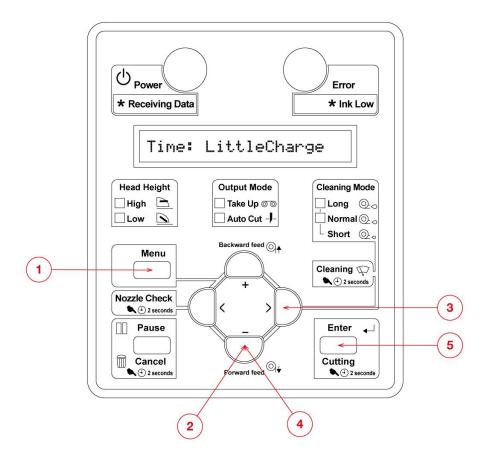



Perform Initial Charge

- 1. Set Head Height to Low (Orange Lever)
- 2. Press the Menu
- 3. Click the Down Arrow button until you see Menu3: Cleaning>
- Click the Right Arrow button
 Click the Down Arrow button until you see Time: InitialCharge
 Click Enter
- 7. Once the Initial Charge is finished, set Head Height back to Mid (Orange Lever)

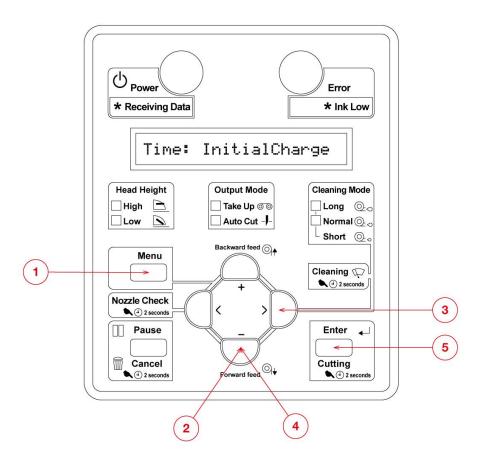

The above Avery Dennison literature provides information to the user for proper application, storage and other requirements. Please refer to Product Data Bulletins or your local Avery Dennison Representative for warranty information. Find the latest information on the Avery Dennison website, son.com. We encourage you to check our website periodically for updates.

All statements, technical Information and recommendations about Avery Dennison products are based upon tests and information believed to be reliable, but do not constitute a guarantee or warranty of any kind. All Avery Dennison products are sold with the understanding that Purchaser has independently determined the suitability of such products for its intended and other purposes.

For technical questions, please contact:

North America: reflective.tech.na@averydennison.com Europe, Middle East & Africa: reflective.tech.emea@eu.averydennison.com Asia Pacific: reflective.tech.ap@ap.averydennison.com South America: reflective.tech.sa@averydennison.com

